



# RECALL REPAIR INSTRUCTIONS

## Canopy Retrofit (for Weather Shield and Sun Shield Users only)

These instructions guide you through the steps to retrofit a Canopy and only apply to recalled strollers with Canopies that have Drawstrings. Refer to the Fig. 3 to determine whether your stroller has a Drawstring.

**Before attempting to install your new Canopy Straps, read and understand these instructions completely to insure proper installation. If you are unclear on any point, contact BOB before installation or use. Save instructions for future reference.**

**HAZARD:** The Canopy Drawstring represents a potential strangulation hazard. The following steps must be taken to safely use your stroller. Do not use your stroller until you have made the necessary repairs.

The Drawstring was designed to gather excess (slack) canopy material that could interfere with air flow to the child occupant when the stroller canopy is used in conjunction with the optional Weather Shield or Sun Shield accessory (which must be purchased separately). The Drawstring is not necessary for stroller canopy to function properly when used without the Weather Shield or Sun Shield.

For stroller users that do not own/use the Weather Shield or Sun Shield, the Drawstring can simply be removed from the stroller and thereby eliminate the potential hazard. For users who use the separately sold BOB Weather Shield or Sun Shield accessory with their stroller, the canopy retrofit kit needs to be installed. Do not use the stroller in combination with a Weather Shield or Sun Shield without first installing the Canopy retrofit kit.

**▲ WARNING** Plastic parts bags, small parts and tools can be dangerous. Keep plastic bags and other packaging, small parts and tools away from children and infants to avoid choking, suffocation or other injuries.

**▲ WARNING** Ensure that all screws and other small parts are correctly installed and tightened so that your child cannot remove them and potentially choke on them.

**Tools Required:** Correct size Phillips head screwdriver.

### REMOVE CANOPY DRAWSTRING

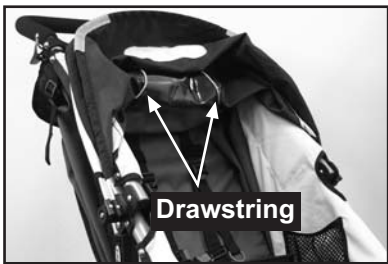


Fig. 1 Interior Drawstring Location

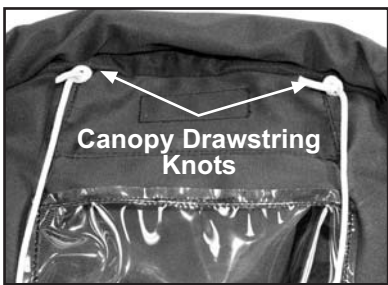


Fig. 2 Untie Drawstring

Remove the Canopy Drawstring(s) by pulling it from the exterior of the canopy, Fig. 3, where the Canopy Drawstring(s) exits the canopy(ies), Fig. 4.

#### 4. Dispose of Canopy Drawstring(s)

Dispose of Canopy Drawstring(s) properly, out of reach of children.

#### 1. Prepare Stroller

Remove child from stroller. Set parking brake, rotate canopy(ies) towards handlebar to expose Drawstring Knots, Fig. 1. (See stroller owner's manual www.bobgear.com).

#### 2. Untie Canopy Drawstring Knots

For single strollers and older Duallies with a single canopy, there is one Canopy Drawstring that needs to be removed.

For newer Duallies with independent (two) canopies, there are two Canopy Drawstrings that need to be removed.

The Canopy Drawstrings are secured to the underside of the canopy by knots, Figs. 1 & 2. Untie the knots.

#### 3. Remove Canopy Drawstring



Fig. 3 Exterior Drawstring Location

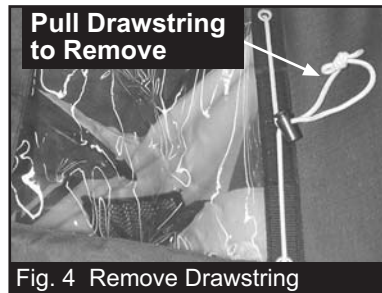


Fig. 4 Remove Drawstring

Compatibility	BOB Part #
All Single Strollers	FA1176
Duallie Strollers with Single Canopy	FA1177
Duallie Strollers with Independent Canopies	FA1178



Fig. 5 Fold Canopy Window Flap

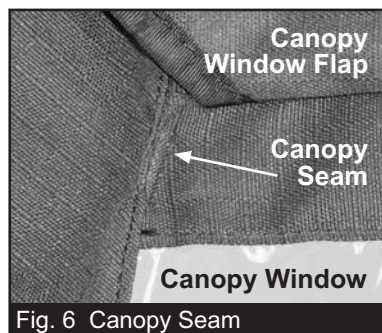


Fig. 6 Canopy Seam



Fig. 7 Fold Canopy Seam

### INSTALL CANOPY STRAPS

Before beginning the installation process, refer to the Compatibility table to confirm you have the correct part kit for your stroller. There are three different Canopy Strap systems, each designed to upgrade a different type of canopy. The Canopy Strap package has the BOB part number on the outside.

### SINGLE STROLLERS AND DUALLIE STROLLERS WITH SINGLE CANOPY

The Canopy Straps attach to the existing canopy by means of a clamping mechanism that clamps to the seams of the canopy.

#### 1. Prepare Stroller

Set parking brake, rotate canopy(ies) to the fully open position.

#### 2. Fold Canopy Window Flap Forward

Fold the canopy window flap forward, Fig. 5, and locate the seam, Fig. 6, above the canopy window (on outside of canopy). The clamp at the end of the Canopy Strap clamps to this seam.

#### 3. Fold Canopy Seam

Fold canopy seam, Fig. 7, to provide sufficient fabric for the clamp to attach to.

#### 4. Attach First Clamp

Insert folded canopy seam between clamping surfaces, Fig. 8, making sure that the top of fold is fully inserted into the length of the clamp. Repeat the process as necessary to insure folded seam is properly inserted between clamping surfaces.

#### 5. Tighten Clamp

While maintaining the seam in the proper position in the clamp, (this can be done by keeping the fabric pressed into the clamp with your thumb) firmly tighten the screw with a Phillips head screwdriver.

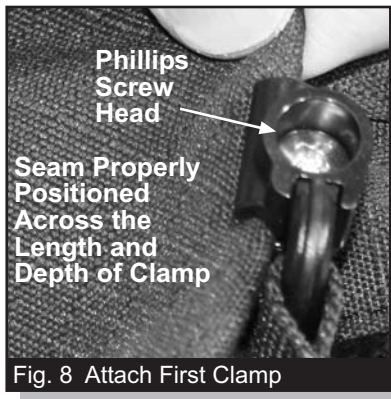


Fig. 8 Attach First Clamp

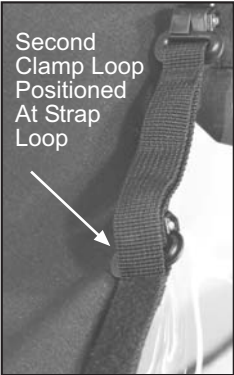


Fig. 9 Position Second Clamp

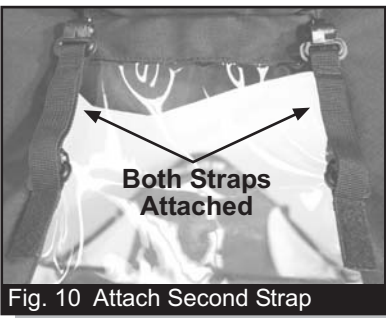


Fig. 10 Attach Second Strap

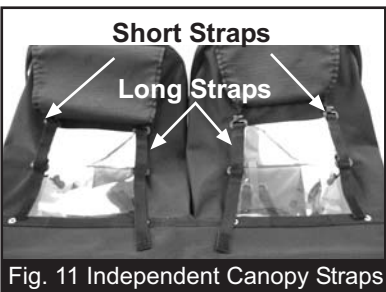


Fig. 11 Independent Canopy Straps

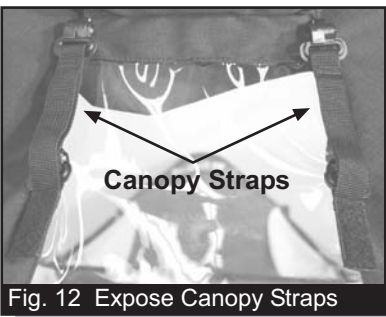


Fig. 12 Expose Canopy Straps

When tightened properly there will be little or no gap visible at the top of the clamp. Additionally, when clamped properly the clamp/strap can be pulled with considerable force and will not come loose or slip. Apply a strong pulling force to confirm the fabric is properly clamped.

**6. Position Second Clamp**  
The second clamp attaches towards the middle of the canopy window, Fig. 9. Orient the clamping surface toward the canopy and slide towards the rear of the strap until the clamp loop comes in contact with the seam in the strap loop. This clamp attaches to the seam that joins the canopy window and the canopy fabric. You will clamp both the clear material and fabric in this step.

clamp loop comes in contact with the seam in the strap loop. This clamp attaches to the seam that joins the canopy window and the canopy fabric. You will clamp both the clear material and fabric in this step.

**7. Attach Second Strap**  
Follow steps 3 through 6 above to complete the attachment of the second Canopy Strap on the opposite side of the canopy, Fig. 10.

**DUALIE STROLLERS WITH INDEPENDENT CANOPIES**  
Straps for Duallie Strollers attach the same way as described above. The only difference is the Canopy Straps are different lengths. The shorter of the Canopy Straps attaches to the exterior of the canopy. The longer Canopy Strap attaches to the interior of the Canopy, Fig. 11. Follow steps 1 through 7 in the previous section to install the Canopy straps. Repeat for the second canopy.

**PREPARE STROLLER FOR SHIELD INSTALLATION**

**▲ WARNING** The following Instructions provide an update to the Warning Tag on the Canopy Flap of your stroller and explain how to prepare your stroller for the installation of the Weather/Sun Shield.

**▲ WARNING** Before attempting to use your upgraded Canopy, read and understand these instructions completely to insure proper use. If you are unclear on any point, contact your dealer or BOB before use.

**▲ WARNING** When the Weather/Sun Shield is used, the rear canopy flap must be in correct position as described below. This will insure proper airflow and avoid danger of suffocation.

**▲ WARNING**  
The Weather Shield is made of a non-breathable material. To avoid danger of suffocation

and excessive temperatures, follow all installation instructions. Please make sure you refer to all other safety related use/assembly information in your original Shield owners manual available at [www.bobgear.com](http://www.bobgear.com)



Fig. 13 Pull Canopy Straps

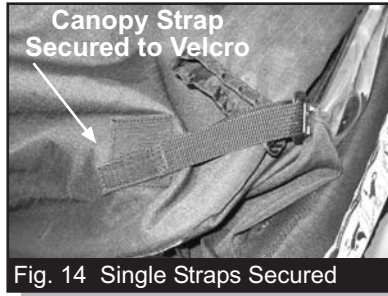


Fig. 14 Single Straps Secured



Fig. 15 Independent Canopy Straps Secured



Fig. 16 Position Canopy



Fig. 17 Fold Canopy Flap



Fig. 18 Inspect Opening

**PREPARATION INSTRUCTIONS**  
When the Weather/Sun Shield is used, the rear canopy flap must be in correct position as described below. This will insure proper airflow and avoid danger of suffocation.

**1. Prepare Stroller**  
Set parking brake and place seat(s) in fully upright position.

**2. Expose Canopy Straps**  
Fold canopy window flap(s) forward, Fig. 5 and secure to Velcro tab(s).

**3. Pull Canopy Straps**  
Pull Canopy Straps firmly to gather and raise canopy material to create air passage, Fig. 13.

**4. Secure Canopy Straps**

**SINGLE STROLLERS AND DUALIE STROLLERS WITH SINGLE CANOPY**  
Pull left and right Canopy Straps and attach to left and right Velcro tabs on canopy, Fig. 14.

**DUALIE STROLLERS WITH INDEPENDENT CANOPIES**  
For each Canopy pull the left and right Canopy Straps and attach to single Velcro Tab on canopy, Fig. 15.

**5. Position Canopy**  
Position rear canopy stay against handlebar and forward canopy stay extended, Fig. 16.

**6. Fold Canopy Flap**  
Fold canopy flap up and over canopy, connecting Velcro strips on back of Canopy Straps, Fig. 17.

**7. Inspect Opening**  
Inspect opening at back of stroller to make sure space between top of seat back and canopy is unobstructed, Fig. 18.